



Wall-mounted monobloc units



General description

Pre-charged units

Equipped with hermetic reciprocating compressor and refrigerant charge R455A (A2L – GWP 148)

Wide application range

Developed to work at wide external temperatures range (min temp +10°C , max temp +43°C). Equipped with condenser fan/s pressure switch (fixed set). Set point from +5°C to -5°C for MT units and set point from -18°C to -25°C for LT units.

Easy installation

Straddle mounted installation, additional option with panel kit to be installed through the wall. Equipped with the drain heater and automatic system to remove condensate water)

“Plug and play” solution

Equipped with the electronic controller (with RS485 serial output), a pre-arranged door switch cable, a pre-arranged room light cable, a pre-arranged door heater cable (for LT units only)



TECHNICAL DATA

Model: ACB430

GENERAL DATA		
Displacement	cc	124,40
Compressor type		Hermetic
Refrigerant charge		R455A
Defrost system		Hot gas

ELECTRICAL DATA		
Voltage	V/ph/Hz	400/3/50
Max power input	W	4460
Max operating current	A	8,09

CONDENSER		
Fan	n. x Ø	1 x 350mm
Air flow rate	m³/h	2300
EVAPORATOR		
Fan	n. x Ø	1 x 350mm
Air flow rate	m³/h	2200
Air thrown	m	11

WEIGHT and DIMENSIONS		
Dimensions	Ref.	Fig. 3M
Net Weight	kg	111
Gross Weight	kg	150
Packing		Wooden crate




Cooling capacity

Ext. Temp.	Room Temp.		*
25°C	-18 °C	W	3280
		m³	41,5
	-20 °C	W	3115
		m³	38,3
	-25 °C	W	2510
		m³	28,9
32 °C	-18 °C	W	2830
		m³	33,1
	-20 °C	W	2684
		m³	30,5
	-25 °C	W	2091
		m³	18,8
43 °C	-18 °C	W	2370
		m³	23,4
	-20 °C	W	2158
		m³	20,5
	-25 °C	W	1625
		m³	11,5


*Suggested m3 Volume for cold rooms with 100mm wall thickness and insulated floor



Installation

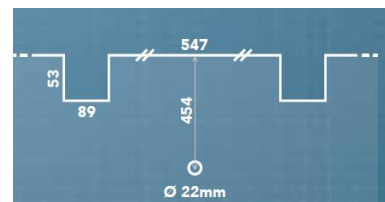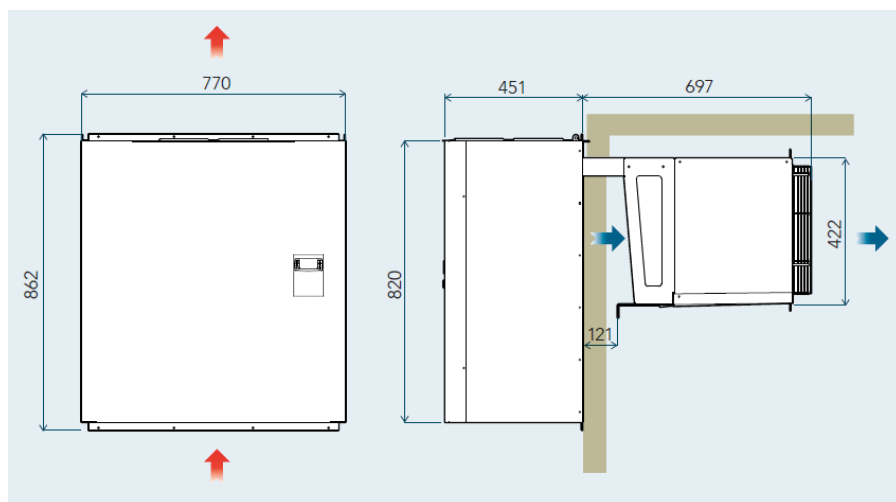

Shipment information

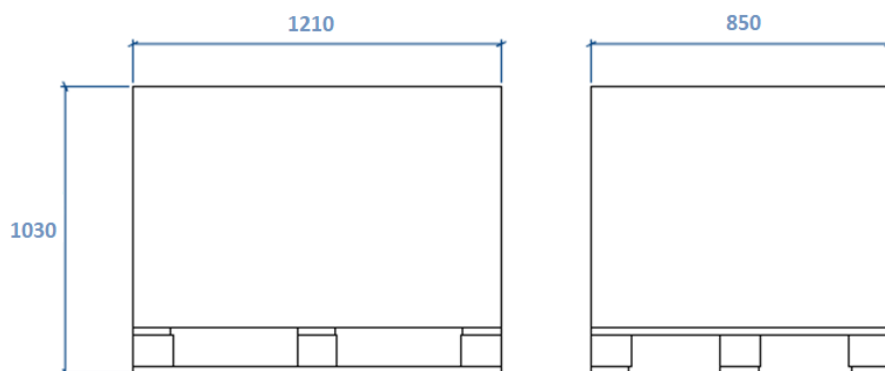

Additional Options

- Crankcase heater (up to -10°C ext. temp)
- Water-cooled condenser (with pressure valve)
- Panel kit (through the wall installation)
- WI-FI connection to a remote monitoring system
- Cataphoresis protection on condenser and evaporator coils
- Special voltage (please contact our Engineering department)