



INDICATIVE PRODUCT IMAGE

Product file

Code	BD2252LA40P12
Gas	R290
Application	LBP
Series	BD
Expansion	Valve
Exchange	Air
Net weight	109 kg
Gross weight	137 kg
Ped	0
Noise	42.33 dBA 10m
Defrost	Hot gas
Mounting	Wall
Type	Compact
Version	Swab

Compressor

Compressor no.	2
Compressor type	Hermetic
Compressor brand	EMBRACO
Compressor voltage	400/3/50
Compressor displacement	2 x 27.8 cm ³

Condenser

Fan-motors no.	2
Fan blade diameter	254 mm
Condenser air flow	1900 m ³ /h

Evaporator

Fan-motors no.	2
Fan blade diameter	254 mm
Air throw	4.50 m
Evaporator air flow	1000 m ³ /h

Absorptions

Power absorbed	1898 W
Current absorbed	3.80 A
Maximum current	10.10 A
Machine electrical supply	400/3/50

Pipe fittings

Condensate drainage	16 mm
---------------------	-------

Dimensions

Width	835 mm
Depth	899 mm
Height	773 mm
Width packaging	940 mm
Depth packaging	970 mm
Height packaging	955 mm

Refrigeration capacity table – BD2252LA40P12 – Refrigerant: R290

Ambient temperature	Cell temperature	Cell volume	Capacity
25 °C	-25 °C	22.70 m ³	1781 W
25 °C	-20 °C	36.30 m ³	2130 W
25 °C	-15 °C	57.80 m ³	2502 W
32 °C	-25 °C	16.00 m ³	1666 W
32 °C	-20 °C	26.00 m ³	1990 W
32 °C	-15 °C	41.50 m ³	2348 W
43 °C	-25 °C	8.40 m ³	1457 W
43 °C	-20 °C	12.90 m ³	1753 W
43 °C	-15 °C	22.70 m ³	2080 W

Values referred to :

Suction gas : +20°C

Subcooling : 0K

Superheat : 100%



Compressor absorption :

Te -5°C (HT); Tcond +50°C

Te -10°C (MT); Tcond +50°C

Te -30°C (LT); Tcond +50°C

Technical drawings – BD2252LA40P12

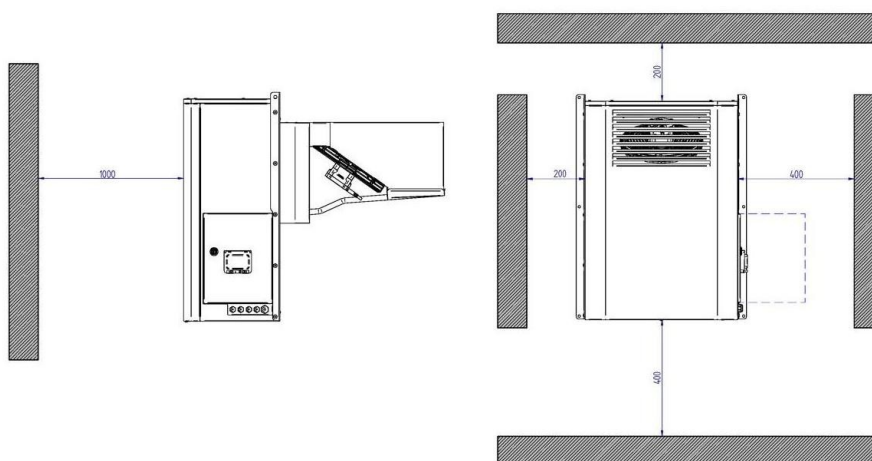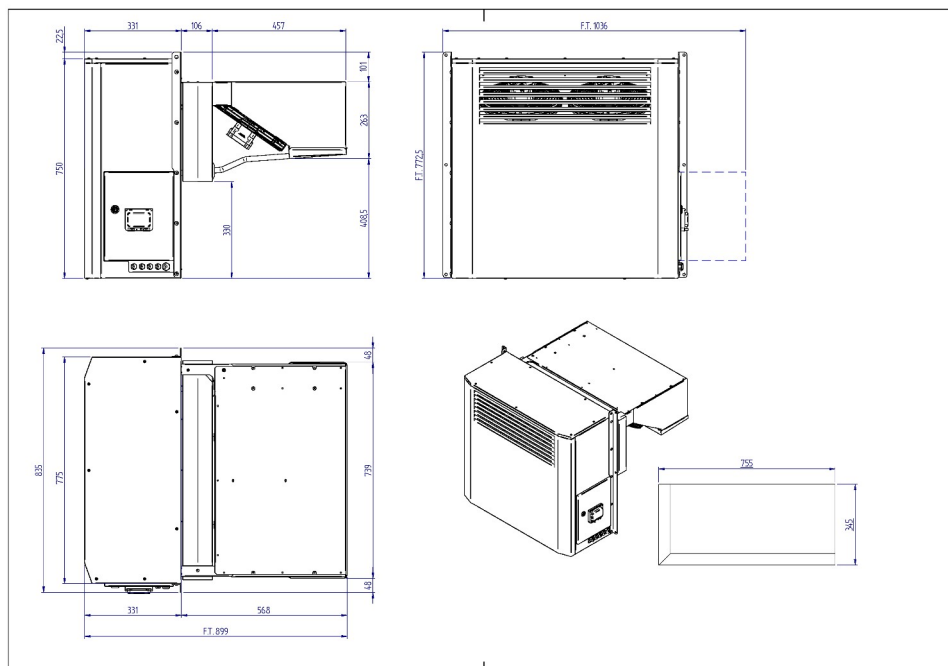



INDICATIVE PRODUCT IMAGE

- **Mechanical part main components**
 - Hermetic compressors with thermal motor protection
 - Condenser with Ø5mm tubes with internal spiral rifling
 - Evaporator with Ø5/16" tubes with internal spiral rifling
 - Electronic fan-motors on both condenser and evaporator
 - Mechanical thermostatic valve supplied standard across the entire range
 - Hot gas defrosting
 - Compressor crankcase heater
 - R290 refrigerant charge ≤ 150g per circuit
 - Condensation temperature control (ON/OFF fans for models size 10 + 30; Adjustable 0-10V fans for models size 40 + 60)
 - Condensing water direct discharge
 - Cold room light fixed on the panel under the evaporator
- **Control circuit and electrical part**
 - Safety pressure switch on high pressure side
 - High and low pressure probes
 - Power supply cable L= 2.5 m with wired electrical plug
 - Industrial Plug (2P+E or 3P+N+E) 16 A / 32A
- **ELECTRONIC CONTROL**
 - Rivolution: programmable electronic control with software developed by Rivacold
 - Safety Defrost function
- **STRUCTURE**
 - Self-bearing housing made of galvanized sheet which is coated with epoxy powder
 - Insulation plug for the cell hole included (thickness 100 mm)
- **OPTIONAL**
 - Catephoresis treatment of exchangers (Condenser + Evaporator)
 - Door micro switch with 10m long cable
 - Door heater cable (10m)
 - Accessory required for multiple units installed in the same cold room (1 per unit) – Master/Slave wiring kit (5 m cable)
 - Connection cable for BMS (RTU Modbus Protocol) L=5 m
 - Door resistance cable L = 10m
 - Electrical panel resistance (Ta < -10°C)
 - Remote control panel (10m)